

CS 532T VA


2-Way Horn Speaker - 30W

- The 30W powered 2-way speaker is equipped with a 100V line transformer with 4 power adjustments 30/15/7.5/3.75W.
- The impact-resistant ABS housing in RAL 7035 guarantees long-term stability.
- For additional reliability, a ceramic block and a thermal fuse is provided.
- The speaker is also secured with the high protection class IP66 against the security risks of environmental influences. Mounting by stainless aluminum universal mount.


EN 54 24






Bandwidth

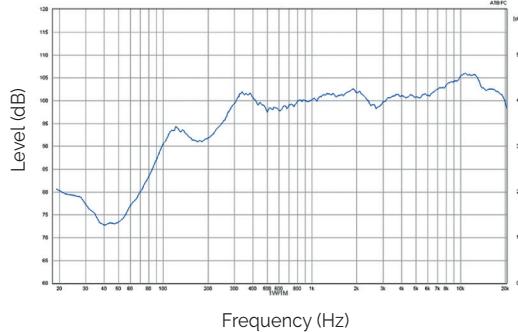

Polar diagrams

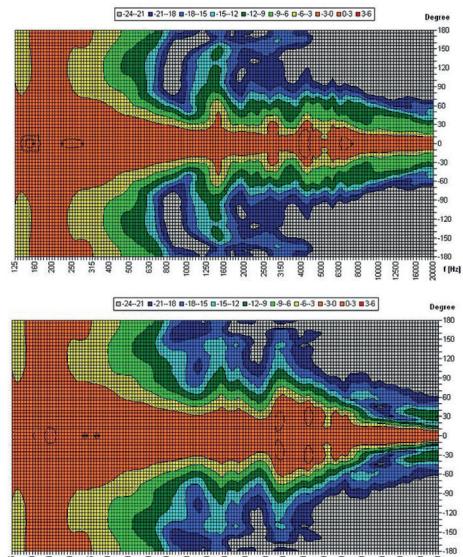

| Model | CS 532T VA |
|---------------------------|-------------------|
| Body & grill | ABS |
| Nominal power | 100W |
| Nominal Impedance | 100Ω |
| Power 100V Line | 100 / 50 / 25W |
| Impedance | 100 / 200 / 400Ω |
| Bandwidth | 280 to 9,000Hz |
| Sensitivity (1W/1m) | 98.1dB |
| SPL MAX 1m | 112dB |
| Directivity (H-V) @ 500Hz | 58° - 35° |
| Directivity (H-V) @ 1kHz | 35° - 25° |
| Directivity (H-V) @ 2kHz | 40° - 20° |
| Directivity (H-V) @ 4kHz | 54° - 15° |
| Speaker | 5" + Driver |
| Dimensions (WxDxH) | 315 x 305 x 350mm |
| Weight | 16kg |
| Operating temperature | -25 to +70°C |
| Protection Index | IP66 |
| Color | White |



| | |
|---|--|
| | EN 54-24 |
| n° 1438 22 | Speaker for voice alarm systems for systems for fire detection systems and fire alarm systems in buildings |
| Certificate n° : 1438-CPR-0865 | CS 532T VA |
| Majorcom 56 chemin de la Flambière 31300 TOULOUSE FRANCE | Type B |