


# CU 350T VA

## Sound Column - 50W



EN 54 24

- The 50W powered speaker is equipped with four 77mm full-range loudspeaker chassis and a 100V transformer with 4 power adjustments.
- The powder coated and shock-resistant aluminium housing in RAL 9006 guarantees long-term stability.
- For additional reliability, a 2 pin-ceramic block, a thermal fuse is provided and the speaker chassis is impregnated against wetness.
- Furthermore sturdy cable glands 2 x PG9 are also provided.
- The speaker is also secured with the high protection class IP66 against the security risks of environmental influences.

Model	CU 350T VA
<b>Body &amp; grill</b>	Aluminium
<b>Nominal power</b>	50W
<b>Nominal Impedance</b>	200Ω
<b>Power 100V Line</b>	50 / 30 / 15 / 7.5W
<b>Impedance</b>	200 / 333 / 667 / 1.333Ω
<b>Bandwidth</b>	110 - 18,000Hz
<b>Sensitivity (1W/1m)</b>	94.7dB
<b>SPL MAX 1m</b>	111.7dB
<b>Directivity (H-V) @ 500Hz</b>	360° - 73°
<b>Directivity (H-V) @ 1kHz</b>	186° - 33°
<b>Directivity (H-V) @ 2kHz</b>	173° - 17°
<b>Directivity (H-V) @ 4kHz</b>	98° - 6°
<b>Speaker</b>	8 x 3"
<b>Dimensions (WxHxD)</b>	100 x 971 x 92mm
<b>Weight</b>	5.2kg
<b>Operating temperature</b>	-25°C ~+70°C
<b>Protection Index</b>	IP66 - IK08
<b>Color</b>	RAL 9006

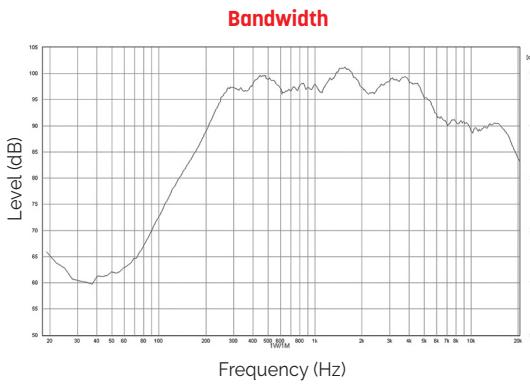

Polar diagrams

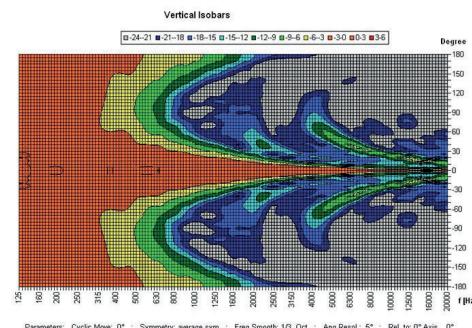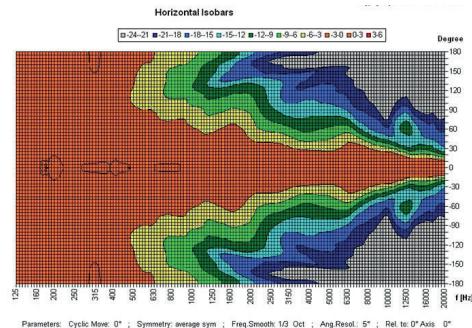

	<b>EN 54-24</b>
n°1438	Speaker for voice alarm systems for systems for fire detection systems and fire alarm systems in buildings
22	
<b>Certificate n° : 1438-CPR-0867</b>	<b>CU 350T VA</b>
Majorcom	
56 chemin de la Flambière	
31300 TOULOUSE	
FRANCE	
	<b>Type B</b>

